


Super-Mini Timing Screw Drive Unit
 3/4" Root Diameter • 1-1/2" Outside Diameter



Mini Timing Screw Drive Unit
 1-1/8" Root Diameter • 2" to 3-1/2" Outside Diameter



Standard Timing Screw Drive Unit
 1-3/4" to 4" Root Diameter • 1-1/2" to 6" Outside Diameter

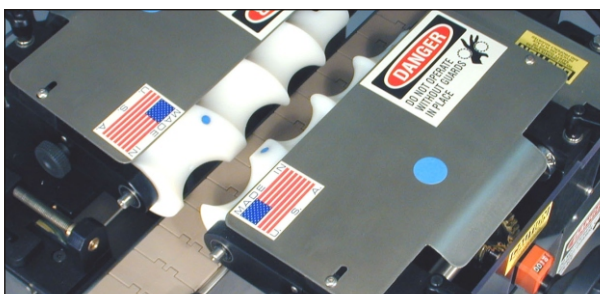

Standard Twin Timing Screw Drive Unit
 1-3/4" to 4" Root Diameter • 1-1/2" to 6" Outside Diameter

Specifications

- Available with Motor and Controller or Take-Off Shaft
- Anodized Aluminum Construction
- Stainless Steel Guards
- Mounts to Existing Conveyor or Equipment
- Horizontal & Vertical Adjustment
- Precision Radial Double Sealed Ball Bearings
- No Tools Required To Change Timing Screw
- Left or Right Hand Feeding
- Stainless Steel Timing Screw Mounting Components
- 1/4 HP Permanent Magnet Gear Motor
 130V DC Up to 500 RPM TENV
 Ambient Temperature 0-40° C
- Vari-Speed Controller with Adjustable Torque
 120V AC 50/60 Hertz in NEMA 4X Enclosure

Options

- Servo or Stepper Motors
- AC & Brushless DC Motors
- Explosion Proof Motors
- Clutches
- Sensors
- Positioning Digital Readouts
- Quick Change of Timing Screw



Body & Neck Custom